
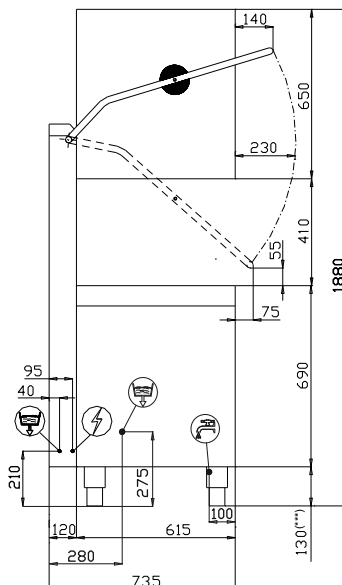


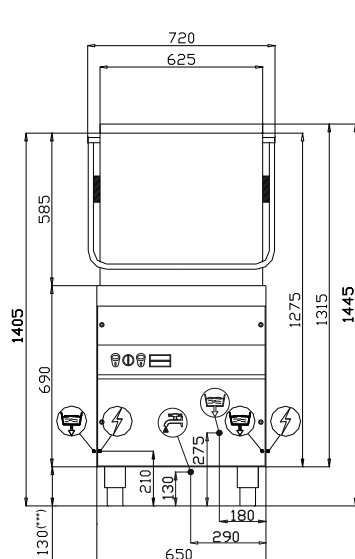

	WATER CONNECTION 3/4" GAS
	DRAINING Ø 24mm
	ELECTRICAL SUPPLY

(***) MIN 130-MAX 200 mm

TECHNICAL DATA			
EXTERNAL DIMENSIONS			
width	720 mm		
depth	735 mm		
height	1445/1880(open hood) mm		
WEIGHT	113 kg		
VOLTAGE	400V 3N 50Hz		
POWER REQUIRED	10490 W		
WATER HARDNESS	2-8 °F		
INLET WATER PRESSURE	200-400 kPa		
CROCKERY DIMENSIONS			
plates diameter	410 mm		
trays max. dimension	GASTRONORM 1/1 (530×325)		
RACK DIMENSION	500X500 mm		
RACK EQUIPMENT	2XC40 - 1XC44 - 2X15060		
WASHING CYCLES (sec)	1(50)	2(100)	3(150)
WATER SUPPLY 55°C			
racks/h(¹)	72	36	24
WATER SUPPLY 10°C			
racks/h(¹)	34(✕)	36	24
WATER CONSUMPTION / CYCLE (water pressure 200kPa)	2.8 L		
BOILER CAPACITY	10 L		
BOILER HEATING ELEMENT	9000 W		
RINSING TEMPERATURE (SET)	85°C		
TANK CAPACITY	42 L		
TANK HEATING ELEMENT	2700 W		
TANK TEMPERATURE (SET)	55°C		
PUMP POWER	1490 W(800 L/min***)		
DRAIN PUMP (optional)	- - - - -		
NOISE	63,6±0.7 dB(A)		

(*) START ONLY TO ACHIEVE OF 82°C ON BOILER THERMOMETER (***) MAXIMUM FLOW RATE

(¹) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.